

HID Platform

USB 2.0 HID Design Platform

ver 1.10

OVERVIEW

The USB 2.0 HID Design Platform is a complete, integrated solution dedicated to use in wide range of USB based Human Interface Devices like mouse, keyboard, pen tablet, joystick, gamepad or barcode scanner.

The complete HID Design Platform includes:

- DUSB2 peripheral controller designed to support 12 Mb/s “Full Speed” (FS) and 480 Mb/s “High Speed” (HS) serial data transmission rates
- DP8051XP ultra high performance, speed optimized, fully customizable 8051 8-bit microcontroller with built in DoCD™ debug IP core
- Human Interface Devices software stack optimized for DP8051XP 8-bit CPU
- FPGA board with ready to use, preprogrammed example HID application
- HAD2 – DoCD™ Hardware Assisted Debugger board
- DoCD™ Debug Software
- DoCD™ driver for Keil development software
- DoCD™ driver for IAR development software

MAIN FEATURES

- Full compliance with the USB 2.0 specification
- Full-speed 12 Mbps operation
- High-speed 480 Mbps operation
- Supports UTMI Transceiver Macrocell Interface
- Suspend and resume power management functions
- 100% software compatible with industry standard 8051
- Up to 256 bytes of internal (on-chip) Data Memory
- Up to 64K bytes of internal (on-chip) or external (off-chip) Program Memory
- Up to 16M bytes of external (off-chip) Data Memory
- User programmable Program Memory Wait States solution for wide range of memories speed
- User programmable External Data Memory Wait States solution for wide range of memories speed
- Fully synthesizable, static synchronous design with positive edge clocking and no internal tri-states
- Scan test ready

DELIVERABLES

- ◆ DUSB2 & DP8051XP source code:
 - VHDL Source Code or/and
 - VERILOG Source Code or/and
 - FPGA netlist
- ◆ DUSB2 & DP8051XP test bench environments
 - NCSim automatic simulation macros
 - ModelSim automatic simulation macros
 - Active-HDL automatic simulation macros
 - Tests with reference responses
- ◆ Human Interface Devices software stack source code
- ◆ FPGA board with ready to use, preprogrammed example application
- ◆ HAD2 - DoCD™ Hardware Assisted Debugger board
- ◆ DoCD™ Debug Software
- ◆ DoCD™ driver for Keil development software
- ◆ DoCD™ driver for IAR development software
- ◆ Technical documentation
 - Installation notes
 - HDL core specification
 - Datasheet
- ◆ Synthesis scripts
- ◆ Technical support
 - IP Core implementation support
 - 3 months maintenance
- Delivery the IP Core updates, minor and major versions changes
- Delivery the documentation updates
- Phone & email support

LICENSING

Comprehensible and clearly defined licensing methods without royalty per chip fees make using of IP Core easy and simply.

Single Site license option is dedicated for small and middle sized companies making its business in one place.

Multi Sites license option is dedicated for corporate customers making its business in several places. Licensed product can be used in selected branches of corporate.


In all cases number of IP Core instantiations within a project, and number of manufactured chips are unlimited. The license is royalty per chip free. There is no time of use restrictions.

There are two formats of delivered IP Core


- VHDL, Verilog RTL synthesizable source code called HDL Source
- FPGA EDIF/NGO/NGD/QXP/VQM called Netlist



SYMBOL

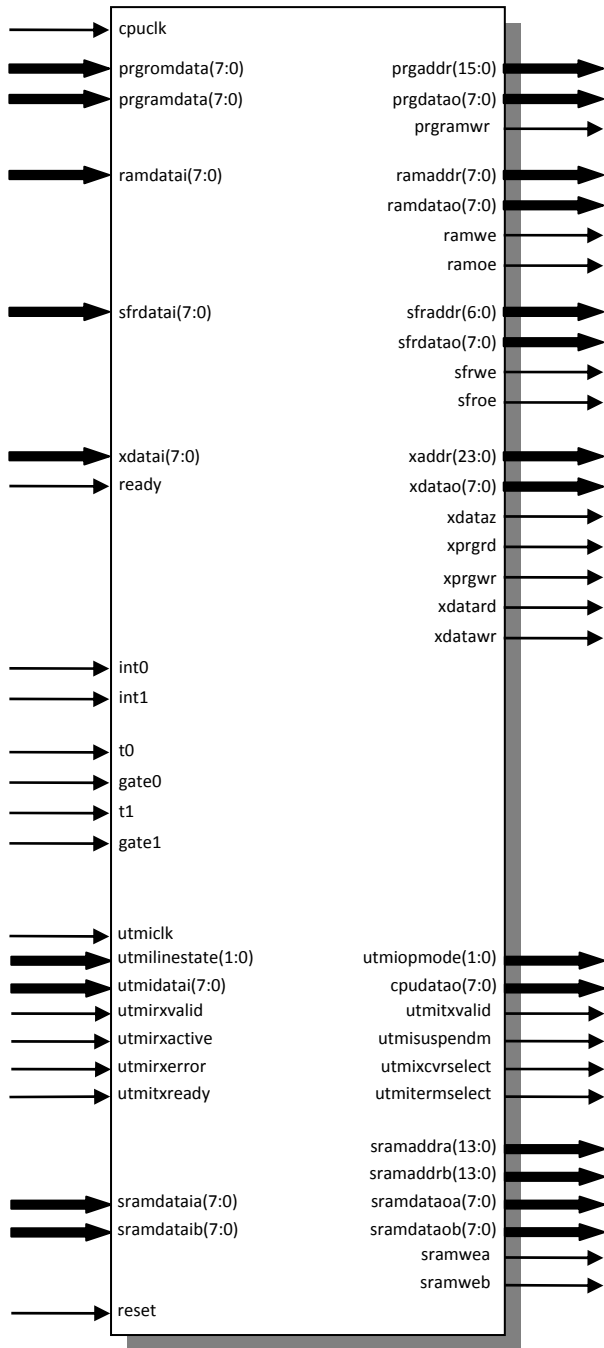

BLOCK DIAGRAM

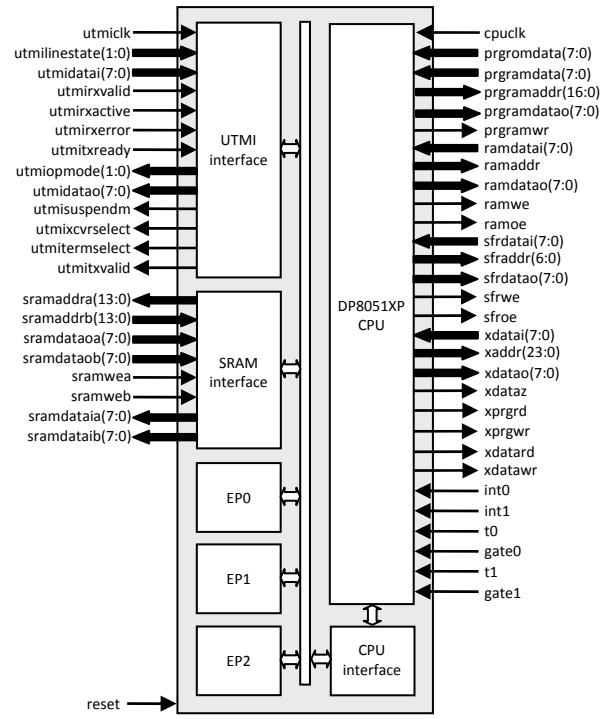

PINS DESCRIPTION

PIN	TYPE	DESCRIPTION
reset	input	Global reset
utmick	input	USB clock
utmilinstae(1:0)	input	USB line state
utmldataa(7:0)	input	USB parallel data input bus
utmrxvalid	input	USB receive valid
utmrxactive	input	USB receive active
utmrxerror	input	USB receive error
utmitxready	input	USB transmit ready
sramdataia(7:0)	input	SRAM port A data input bus
sramdataib(7:0)	input	SRAM port B data input bus
cpuclk	input	CPU clock
prgramdata[7:0]	input	Data bus from internal RAM program memory
prgromdata[7:0]	input	Data bus from internal ROM progogram memory
ramdataa[7:0]	input	Data bus from internal data memory
sfrdataa[7:0]	input	Data bus from user SFR's
xdataa[7:0]	input	Data bus from external memories
int0	input	External interrupt 0
int1	input	External interrupt 1
t0	input	Timer 0 input
gate0	input	Timer 0 gate input
t1	input	Timer 1 input
gate1	input	Timer 1 gate input
utmioptime(1:0)	output	USB operational mode
utmldatao(7:0)	output	USB parallel data output bus
utmisuspendm	output	USB suspend
utmxcvselect	output	USB transceiver select
utmtermselect	output	USB termination select
utmitxvalid	output	USB transmit valid
sramaddr(13:0)	output	SRAM port A address bus
sramaddrb(13:0)	output	SRAM port B address bus
sramdataoa(7:0)	output	SRAM port A data output bus
sramdataob(7:0)	output	SRAM port B data output bus
sramwea	output	SRAM port A write enable
sramweb	output	SRAM port B write enable
prgaddr[15:0]	output	Internal program memory address bus
prgdatao[7:0]	output	Data bus for internal program memory
prgramwr	output	Internal program memory write
ramaddr[7:0]	output	Internal Data Memory address bus
ramdatao[7:0]	output	Data bus for internal data memory

PIN	TYPE	DESCRIPTION
ramoe	output	Internal data memory output enable
ramwe	output	Internal data memory write enable
sfraddr[6:0]	output	Address bus for user SFR's
sfrdatao[7:0]	output	Data bus for user SFR's
sfroe	output	User SFR's output enable
sfrwe	output	User SFR's write enable
xaddr[23:0]	output	Address bus for external memories
xdatao[7:0]	output	Data bus for external memories
xdataz	output	Turn xdata bus into 'Z' state
xprgrd	output	External program memory read
xprgwr	output	External program memory write
xdatard	output	External data memory read
xdatawr	output	External data memory write

UNITS SUMMARY

UTMI Interface – This module is clocked by utmick clock and manages communication with USB 2.0 Transceiver Macrocell. It is responsible for reset detection, speed handshake, token, data and handshake packet reception and transmission.

CPU Interface – This module is clocked by cpuclock and manages communication with DP8051XP CPU. In this module are located DUSB2 core configuration and status registers.

SRAM Interface – This module manages communication with Synchronous Random Access Memory. It generates address, read and write signals for the SRAM memory and buffers data bytes during the FIFO read and write operations.

EP0 endpoint –The EP0 control endpoint is special bidirectional endpoint used for device configuration and allows generic USB control and status access.

EP1 & EP2 endpoints – The EP1 and EP2 data endpoints are unidirectional configurable endpoints used for application specific data transmission.

DP8051XP CPU – Ultra high performance, speed optimized 8-bit embedded controller, 100% software compatible with industry standard 8051.

PERFORMANCE

The following tables give a survey about the Core area and performance in Programmable Logic Devices after Place & Route.

Device	Speed grade	cpuclock F _{max}	utmick F _{max}
SC	-7	100 MHz	>100 MHz
ECP2	-7	80 MHz	>100 MHz
ECP2M	-7	70 MHz	>100 MHz
XP2	-7	60 MHz	>100 MHz

Core performance in LATTICE® devices

Area utilized by complete, integrated USB 2.0 HID Design Platform in vendor specific technologies are summarized in table below.

Component	Area	
	[LUT4s]	[FFs]
CPU interface	215	170
UTMI interface	250	230
SRAM interface	110	95
EP0 endpoint	145	140
EP1 endpoint	155	155
EP2 endpoint	155	155
DP8051XP CPU	1180	395
DoCD™ debug IP core	360	270
Total area	2570	1610

Core components area utilization in ECP2 and ECP2M families

Component	Area	
	[LUT4s]	[FFs]
CPU interface	240	170
UTMI interface	290	230
SRAM interface	120	95
EP0 endpoint	160	140
EP1 endpoint	175	155
EP2 endpoint	175	155
DP8051XP CPU	1315	395
DoCD™ debug IP core	400	270
Total area	2875	1610

Core components area utilization in XP2 family

Component	Area	
	[LUT4s]	[FFs]
CPU interface	200	170
UTMI interface	230	230
SRAM interface	100	95
EP0 endpoint	130	140
EP1 endpoint	140	155
EP2 endpoint	140	155
DP8051XP CPU	1100	395
DoCD™ debug IP core	330	270
Total area	2370	1610

Core components area utilization in SC family

CONTACTS

For any modifications or special requests contact to DCD.

Headquarters:

Wroclawska 94

41-902 Bytom, POLAND

e-mail: info@dcd.pl

tel. : +48 32 282 82 66

fax : +48 32 282 74 37

Distributors:

Please check <http://www.dcd.pl/apartn.php>