


DI2CS



Slave I2C bus controller with FIFO

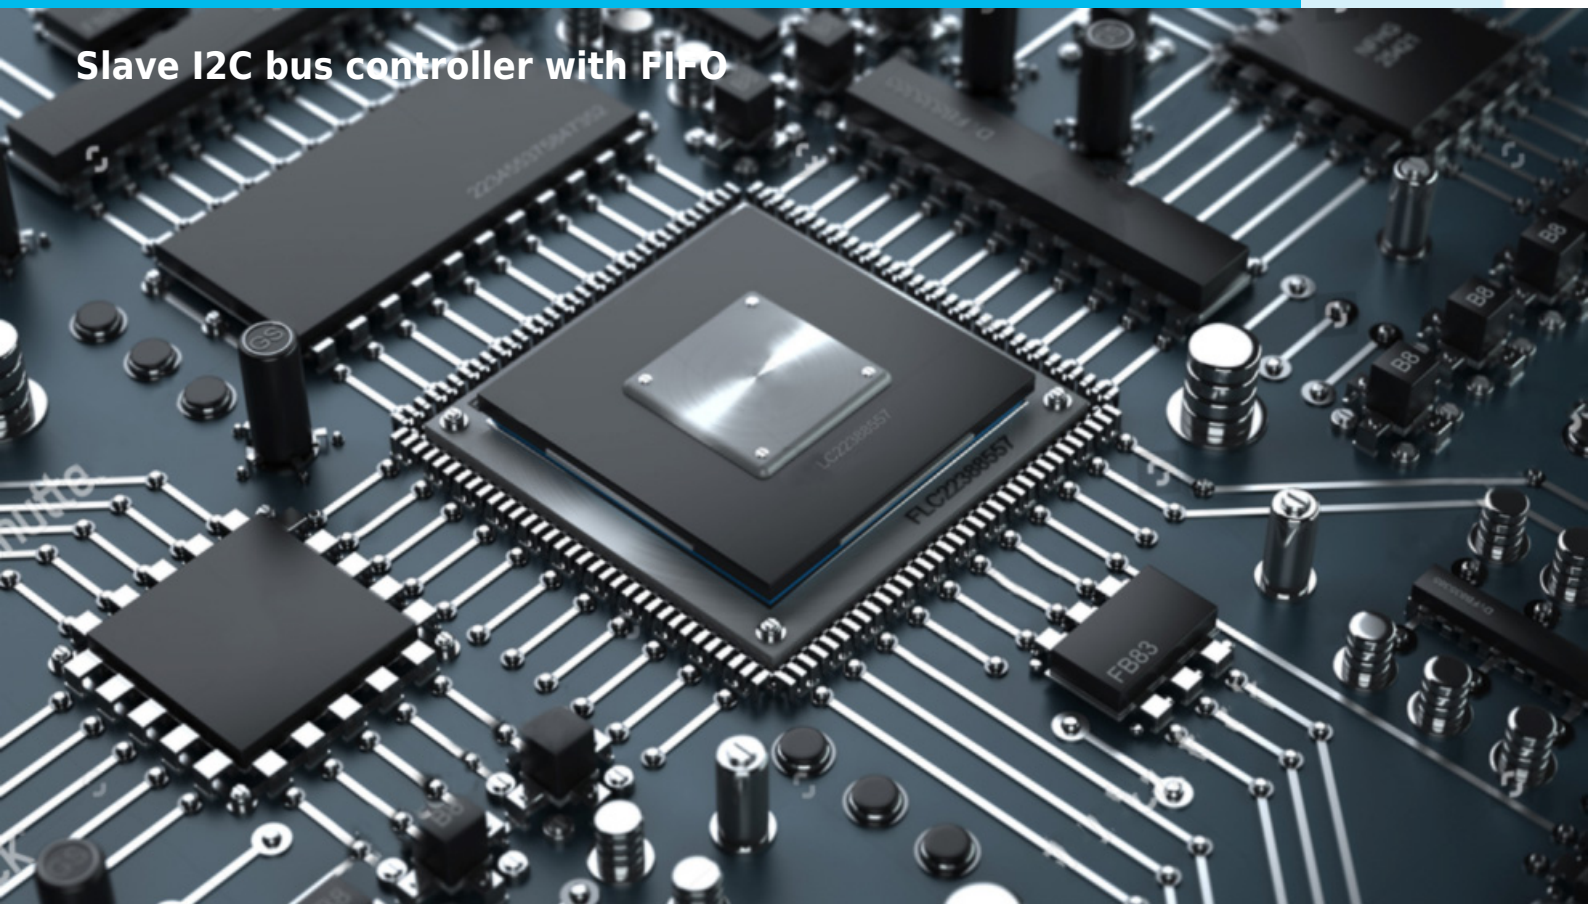

COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

IP CORE OVERVIEW

DI2CS bridge to APB, AHB, AXI bus, provides an interface between a microprocessor/microcontroller and I2C bus. It can work as:

- a slave transmitter or
- slave receiver

depending on a working mode determined by the master device. The DI2CS core **incorporates all features required by the latest I2C specification**, including:

- clock synchronization,
- arbitration,
- high-speed transmission mode.

The **DI2CS** supports all transmission speed modes:

- Standard (up to 100 kb/s)
- Fast (up to 400 kb/s)
- Fast Plus (up to 1 Mb/s)
- High Speed (up to 3,4 Mb/s)

DCD's IP Core is a **technology-independent design** and can be implemented in various process technologies.

DESIGN FEATURES:

ALL DCD'S IP CORES ARE TECHNOLOGY INDEPENDENT WHICH MEANS THAT THEY ARE 100% COMPATIBLE WITH ALL FPGA & ASIC VENDORS E.G.

- **Altera / Intel,**
- **Xilinx / AMD,**
- **Lattice,**
- **Microsemi / Microchip,**
and others.
- **TSMC**
- **UMC**
- **SK Hynix**
and others.

KEY FEATURES

- Conforms to v.3.0 of the I2C specification

- Slave operation
 - Slave transmitter
 - Slave receiver
- Supports 3 transmission speed modes
 - Standard (up to 100 kb/s)
 - Fast (up to 400 kb/s)
 - Fast Plus (up to 1 Mb/s)
 - High Speed (up to 3,4 Mb/s)
- Double buffering of RX/TX data
- Configurable RX and TX FIFOs up to 256 bytes each
- Configurable length of SCL, SDA lines glitch filtering
- Allows operation from a wide range of input clock frequencies
- Simple interface allows easy connection to microprocessor/microcontroller devices
- Interrupt generation
- User-defined data setup time
- **Available system interface wrappers:**
 - **AMBA - APB / AHB / AXI Bus**
 - **Altera Avalon Bus**
 - **Xilinx OPB Bus**
- Fully synthesizable
- Static synchronous design
- Positive edge clocking and no internal tri-states
- Scan test ready

APPLICATIONS

- Embedded microprocessor boards
- Consumer and professional audio/video
- Home and automotive radio
- Low-power applications
- Communication systems
- Cost-effective reliable automotive systems

UNITS SUMMARY

CPU Interface - Performs the interface functions between DI2CS internal blocks and microprocessor. It allows easy connection of the core with the microprocessor/microcontroller system.

Control Logic - Manages execution of all commands sent via interface. Synchronizes internal data flow.

Shift Register - Controls SDA line, performs data and address shifts during the data transmission and reception.

Control Register - Contains five control bits used for performing all types of I²C Bus transmissions.

Status Register - Contains seven status bits that indicate state of the I²C Bus and the DI2CS core.

Input Filter - Performs spike filtering.

Synchronization Logic - Performs DI2CS core synchronization.

Clock Stretching - Performs I²C SCL clock stretching when DI2CS core is not ready for next transmission.

PERFORMANCE

The following table gives a survey about the Core area and performance in **LATTICE®** devices after Place & Route (all key features included):

Device	Speed grade	LUTs/PFUs	F _{max}
SC	-7	200 / 60	284 MHz
ECP2	-7	220 / 60	245 MHz
ECP2M	-7	183 / 59	258 MHz
XP2	-7	183 / 59	220 MHz
EC	-5	229 / 61	166 MHz
ECP	-5	229 / 611	167 MHz
XP	-5	229 / 61	148 MHz
ispXPGA	-5	176 / 51	141 MHz
ORCA 4	-3	218 / 37	97 MHz
ORCA 3	-7	169 / 37	56 MHz

DELIVERABLES

- **Source code:**
 - VERILOG or VHDL Source Code
 - VERILOG or VHDL test bench environment
 - Active-HDL automatic simulation macros
 - ModelSim automatic simulation macros
 - Tests with reference responses
 - Technical documentation
 - Installation notes
 - HDL core specification
 - Datasheet
 - Synthesis scripts
 - Example application
- **Netlist**
 - Netlist for selected FPGA family
 - Sample FPGA project
 - Technical documentation
 - HDL core specification
 - Datasheet
- **Technical support**

- IP Core implementation
- 12 months maintenance
 - Delivery of the IP Core and documentation updates
 - Phone & email support
 - Design consulting

LICENSING

Comprehensible and clearly defined licensing methods without royalty-per-chip fees make use of our IP Cores easy and simple.

- **Single-Site license option** - dedicated to small and middle sized companies which run their business at one place.

- **Multi-Site license option** - dedicated to corporate customers which operate at several locations. The licensed product can be used at selected company branches.

In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. There are no restrictions regarding the time of use.

There are two formats of the delivered IP Core that you can choose from:

- VHDL or Verilog RTL synthesizable source code (called HDL Source code)

- FPGA EDIF/NGO/NGD/QXP/VQM (called Netlist)

HDL Source code is suitable for ASIC and FPGA projects. The Netlist license is intended for FPGA projects only.

CONTACT

Digital Core Design Headquarters:

Wroclawska 94, 41-902 Bytom, POLAND

E-mail: info@dcd.pl

tel.: +48 32 282 82 66

fax: +48 32 282 74 37

Distributors:

Please check: dcd.pl/contact-us/