


DI2CSB



I2C Bus Interface Slave - Base version

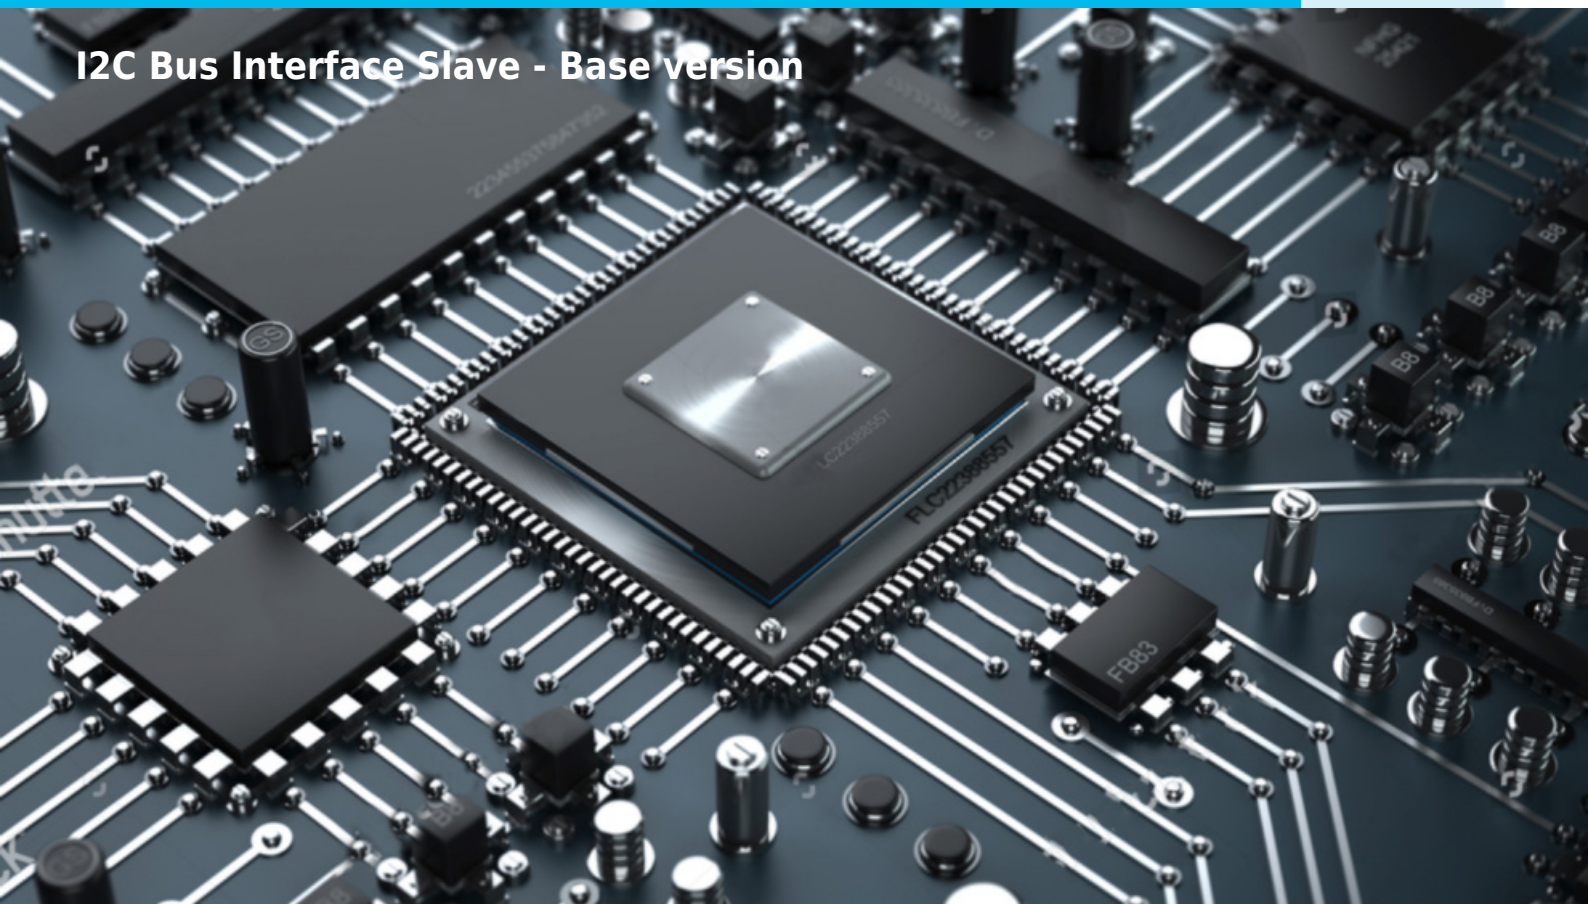

COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

IP CORE OVERVIEW

The **DI2CSB** provides an interface between a passive target device e.g. memory, LCD display, pressure sensors etc. and I2C bus. It can work as:

- a slave receiver or
- transmitter

depending on a working mode determined by the master device. A **very simple interface**, composed with read, write and data signals, allows **easy connection to target devices**. The core **does not require any programming and is ready to work after power up/reset**. Read, write, burst read, burst write and repeated start transmissions are automatically recognized by the core. The solution incorporates all features required by the I2C specification. The DI2CSB supports the following **transmission modes**:

- **Standard,**
- **Fast,**
- **Fast Plus,**
- **High Speed.**

The DI2CS is a **technology independent design** and can be implemented in various process technologies.

KEY FEATURES

- Conforms to the latest I2C specification
- Slave operation
 - Slave transmitter
 - Slave receiver
- Supports 3 transmission speed modes
 - Standard (up to 100 kb/s)
 - Fast (up to 400 kb/s)
 - Fast Plus (up to 1 Mb/s)
 - High Speed (up to 3,4 Mb/s)
- Allows operation from a wide range of input clock frequencies
- Support for reads, writes, burst reads, burst writes, and repeated start
- 7-bit addressing
- **No programming required**
- Simple interface allows easy connection to target device e.g. memory, LCD display, pressure sensors etc.

- Fully synthesizable
- Static synchronous design
- Positive edge clocking and no internal tri-states
- Scan test ready

APPLICATIONS

- Embedded microprocessor boards
- Consumer and professional audio/video
- Home and automotive radio
- Low-power applications
- Communication systems
- Cost-effective reliable automotive systems

UNITS SUMMARY

Target device Interface - Performs the interface functions between DI2CSB internal blocks and target device. Allows easy connection of the core with passive devices e.g. memory, LCD display, pressure sensors, I/O devices etc.

Control Logic - Manages execution of all commands sent via interface. Synchronizes internal data flow.

Shift Register - Controls SDA line, performs data and address shifts, during the data transmission and reception.

Input Filter - Performs spike filtering.

Synchronization Logic - Synchronizes data and address shifts, during the data transmission and reception. SCLI spikes are filtered by this unit.

PERFORMANCE

The following table gives a survey about the Core area and performance in **XILINX®** devices after Place & Route (all key features included):

Family	Device	Speed grade	LUT	Slice	F _{max}
Spartan-3	xc3s50	-5	73	50	218 MHz
Spartan-3E	xc3s100e	-5	73	50	213 MHz
Spartan-6	xc6slx4	-3	48	33	336 MHz
Virtex-4	xc4vfx12	-12	76	48	467 MHz
Virtex-5	xc5vlx20t	-2	57	30	487 MHz
Virtex-6	xc6vlx75t	-3	43	23	515 MHz
Virtex-7	xc7vx330t	-3	50	23	478 MHz
Kintex-7	xc7k70t	-3	50	18	702 MHz
Artix-7	xc7a100t	-3	43	17	478 MHz
Virtex UltraScale	xcvu065	-3	48	7	500
Zynq-7000	xc7z010	-3	48	21	450

DELIVERABLES

- **Source code:**
 - VERILOG or VHDL Source Code
 - VERILOG or VHDL test bench environment
 - Active-HDL automatic simulation macros
 - ModelSim automatic simulation macros
 - Tests with reference responses
- Technical documentation
 - Installation notes

- HDL core specification
- Datasheet
- Synthesis scripts
- Example application
- **Netlist**
 - Netlist for selected FPGA family
 - Sample FPGA project
 - Technical documentation
 - HDL core specification
 - Datasheet
- **Technical support**
 - IP Core implementation
 - 3 months maintenance
 - Delivery of the IP Core and documentation updates, minor and major versions changes
 - Phone & email support

LICENSING

Transparent and clearly defined licensing methods without royalty-per-chip fees, make use of our IP Cores easy & simple.

- **Single-Site license option** - dedicated to small and

middle sized companies, which run their business in one place.

- **Multi-Site license option** - dedicated to corporate customers who operate at several locations. The licensed product can be used in selected company branches.

In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. The license is royalty-per-chip free. There are no restrictions regarding the time of use.

There are two formats of the delivered IP Core:

- VHDL or Verilog RTL synthesizable HDL Source code
- FPGA EDIF/NGO/NGD/QXP/VQM Netlist

CONTACT

Digital Core Design Headquarters:

Wroclawska 94, 41-902 Bytom, POLAND

E-mail: info@dcd.pl

tel.: 0048 32 282 82 66

fax: 0048 32 282 74 37

Distributors:

Please check: dcd.pl/contact-us/