


# DMAC



**10/100 Mb Media Access Controller**

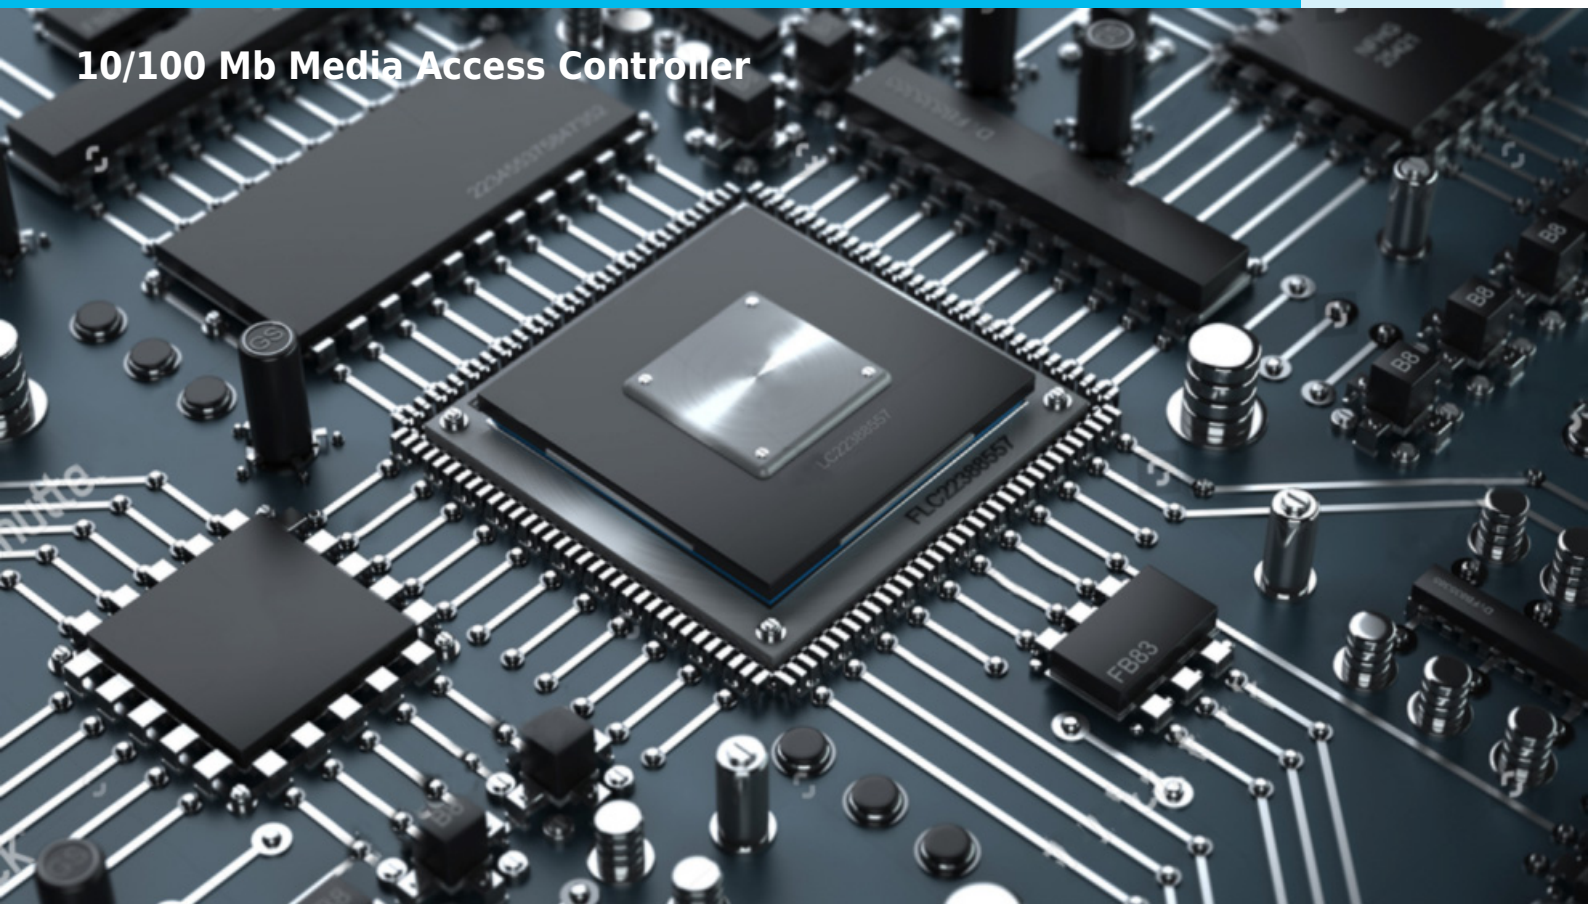

## COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

## IP CORE OVERVIEW

**DMAC** bridge to APB, AHB, AXI bus. Ethernet specification served as the basis for the 802.3 standard, which specifies the physical and lower software layers. Since its commercial release, Ethernet has retained a good degree of compatibility. Digital Core Design **focuses on innovation** but remembers standardization. That's why our **DMAC** solution is a **hardware implementation** of a media access control protocol defined by the IEEE standard. Thanks to our IP Core, functionality in **design has never been better before**. The DMAC in cooperation with the external PHY device enables network functionality in design. It is able to transmit and receive Ethernet frames to and from the network. **Half and full duplex modes are supported**, as well as **10 and 100 Mbit/s speed**. The Core can work with a **wide range of processors**: 8, 16, and 32-bit data bus, either little or big endian byte order format. The DMAC provides a static configuration of PHY IC. Please remember that our design is technology independent, and thus **can be implemented in a variety of process technologies**. This Core strictly conforms to the **IEEE 802.3 standard**.

### DESIGN FEATURES:

**ALL DCD'S IP CORES ARE TECHNOLOGY INDEPENDENT WHICH MEANS THAT THEY ARE 100% COMPATIBLE WITH ALL FPGA & ASIC VENDORS E.G.**

- **Altera / Intel,**
- **Xilinx / AMD,**
- **Lattice,**
- **Microsemi / Microchip,**  
**and others.**
- **TSMC**
- **UMC**
- **SK Hynix**  
**and others.**

## KEY FEATURES

- Conforms to IEEE 802.3-2002 specification
- Configurable width CPU interface with little or big endianness:
  - 8-bit
  - 16-bit
  - 32-bit

- Simple interface allows easy connection to CPU
- Narrow address bus (4 bits) with indirect I/O interface for transmitted and received data dual port memories
- Supports 10BASE-T and 100BASE-TX/FX IEEE 802.3 compliant MII PHYs
- Media Independent Interface (MII) for connection to external 10/100 Mbps PHY transceivers
- Supports full and half duplex operation at 10 Mbps or 100 Mbps
- CRC-32 algorithm:
  - calculates the FCS nibble at a time
  - automatic FCS generation and checking
  - able to capture frames with CRC errors if required
- Dynamic PHY configuration by STA management interface
- Early receive and transmit interrupts to increase data throughput
- Programmable MAC address
- Promiscuous mode support
- Allows operation from a wide range of input bus clock frequencies
- Fully synthesizable
- Static synchronous design
- Positive edge clocking
- No internal tri-states
- Lite design, small gate count and fast operation
- Scan test ready
- **Available system interface wrappers:**
  - **AMBA - APB / AHB / AXI Bus**
  - **Altera Avalon Bus**
  - **Xilinx OPB Bus**

## UNITS SUMMARY

**Transmit module** - Performs transmit management functions, sends frames to Ethernet medium.

**Receive module** - is responsible for receiving frames from the Ethernet. Provides necessary functions for frame decapsulation, CRC checking, address recognizing and error detection.

**Synchronization logic** - There are 3 clock domains in the DMAC core - this module performs synchronization between them.

**TX RAM / RX FIFO RAM interfaces** - Interfaces to external dual port memories used by the DMAC core, to store received and transmitted frames.

**Control and I/O logic** - This module provides interface to CPU/BUS. It exchanges data and control logic with transmit and receive modules, thus controls these, to perform transmit and receive operations.

**STA** - Station Management entity, enables communication with PHY, via simple serial management interface.

## PERFORMANCE

The following table gives a survey about the Core area and performance in **INTEL FPGA®** devices after Place & Route (all key features included):

Device	Speed grade	LE/ALM	F <sub>max</sub> [MHz]		
			clk	rxclk	txclk

STRATIX IV	-1	876 + 4 kB RAM	420 / 380 / 350
STRATIX III	-2	878 + 4 kB RAM	370 / 400 / 350
STRATIX II	-3	879 + 4 kB RAM	270 / 280 / 270
CYCLONE IV	-6	1 304 + 4 kB RAM	200 / 220 / 200
CYCLONE III	-6	1 302 + 4 kB RAM	190 / 190 / 200
CYCLONE II	-6	1 292 + 4 kB RAM	158 / 170 / 180
STRATIX GX	-5	1 255 + 4 kB RAM	152 / 156 / 138
STRATIX	-5	1 255 + 4 kB RAM	162 / 147 / 137
CYCLONE	-6	1 254 + 4 kB RAM	148 / 133 / 133
APEX II	-7	1 622 + 4 kB RAM	145 / 106 / 111
APEX20KC	-7	1 622 + 4 kB RAM	127 / 118 / 117
APEX20KE	-1	1 622 + 4 kB RAM	108 / 99 / 111
APEX20K	-1	1 622 + 4 kB RAM	86 / 87 / 88

## APPLICATIONS

- Embedded microprocessor boards
- Networking devices (Network Interface Cards, routers, switches)
- Communication systems

## DELIVERABLES

- **Source code:**
  - VERILOG or VHDL Source Code
  - VERILOG or VHDL test bench environment
    - Active-HDL automatic simulation macros
    - ModelSim automatic simulation macros
    - Tests with reference responses
  - Technical documentation
    - Installation notes
    - HDL core specification
    - Datasheet
  - Synthesis scripts
  - Example application
- **Netlist**
  - Netlist for selected FPGA family
  - Sample FPGA project
  - Technical documentation
    - HDL core specification

- Datasheet
- **Technical support**
  - IP Core implementation
  - 12 months maintenance
    - Delivery of the IP Core and documentation updates
    - Phone & email support
    - Design consulting

## LICENSING

Comprehensible and clearly defined licensing methods without royalty-per-chip fees make use of our IP Cores easy and simple.

- **Single-Site license option** - dedicated to small and middle sized companies which run their business at one place.

- **Multi-Site license option** - dedicated to corporate customers which operate at several locations. The licensed product can be used at selected company branches.

In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. There are no restrictions regarding the time of use.

There are two formats of the delivered IP Core that you can choose from:

- VHDL or Verilog RTL synthesizable source code (called HDL Source code)

- FPGA EDIF/NGO/NGD/QXP/VQM (called Netlist)

HDL Source code is suitable for ASIC and FPGA projects. The Netlist license is intended for FPGA projects only.

## CONTACT

### Digital Core Design Headquarters:

Wroclawska 94, 41-902 Bytom, POLAND

E-mail: [info@dcd.pl](mailto:info@dcd.pl)

tel.: +48 32 282 82 66

fax: +48 32 282 74 37

### Distributors:

Please check: [dcd.pl/contact-us/](http://dcd.pl/contact-us/)