


DHDLC



HDLC/SDLC controller

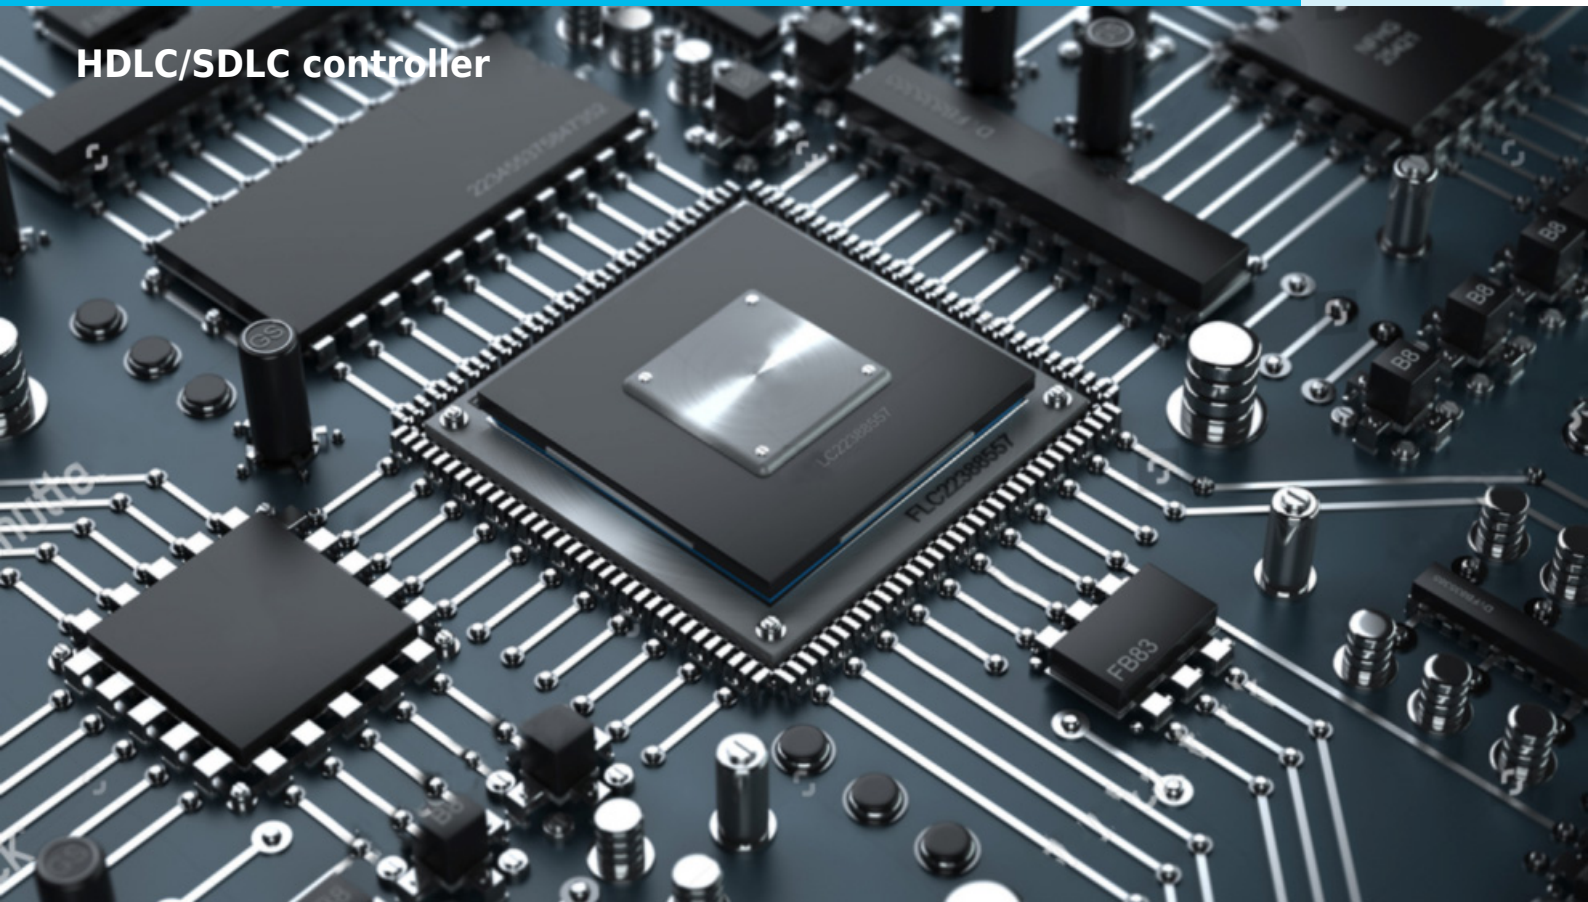

COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

IP CORE OVERVIEW

The DHDLC IP Core provides versatile support for a widely used HDLC transmission protocol. It manages the **bit stuffing process**, both **address appending** and **detection**. And if it's not enough, let's just mention that DCD's IP Core **supports CRC16** and **CRC32** computation. **Increased system performance and reduced CPU overload** is a must be, thanks to the presence of separate receiver and transmitter FIFO buffers, maskable interrupt and DMA interface request. The **DHDLC is a fully scalable** IP Core, which makes it a perfect solution for both hi-end and deeply embedded projects. It's tailored to your project needs and can be **provided with:**

- small 8-bit SRAM-like interface
- 32-bit full AXI4 slave interface with burst support
- AXI4Lite interface
- AHB and APB slave interfaces

The optional **Frame Status Buffer** stores information about frames size and error conditions. Moreover, the size of the receiver and transmitter FIFO buffers is configurable. You can also **easily remove unused features before the synthesis** process. All that and much more make the DHDLC an ideal solution for very popular higher level protocol implementations like e.g. **PPP (Point-to-Point)**, **X.25**, **V.42**, **LAB-B**, **SDLC**, **ISDN** and many others.

KEY FEATURES

- Two separate receiver and transmitter interfaces.
- Two separate, configurable FIFO buffers for receiver and transmitter
- Bit stuffing and unstuffing
- Address recognition for receiver and address insertion for transmitter
- Two or one byte address field
- CRC-16 and CRC-32 computation and checking
- Collision detection
- Byte alignment error detection
- Programmable number of bits for idle detection
- NRZI coding support
- Shared flags, shared zeroes support
- Pad fill with flags option
- Transmitter clock generation

- 8-bit, 16-bit, 32-bit CPU interface
- Interrupt output for handling control flags and FIFOs' filling
- Configurable core parameters

UNITS SUMMARY

CPU Interface - it performs operations of reading and writing internal registers of module.

Serial Interface - it performs bit stuffing and unstuffing, NRZI coding, collision detection, CRC calculation, flags and abort detection, idle detection and synchronizes serial inputs with main clock domain.

FIFO control - it manages access to FIFO buffers of receive and transmitter.

Control Unit - it controls HDLC frame and services request from CPU interface module.

Clock Divider - it generates divided clock signal for TXCLKO output.

DESIGN FEATURES

The DHDLC IP core is fully synchronous, with one clock domain design. All parameters are configurable by a CPU. There is also capability for setting parameters by modification of constants in the source file. There is no need to waste silicon resources on unused features and constant settings.

APPLICATIONS

- CPU based applications with serial interface based on HDLC/SDLC protocol
- Telecommunication

PERFORMANCE

The following table gives a survey about the Core area and performance in **XILINX®** devices after Place & Route:

Device	LUTs /Slices	Memory Blocks	F _{max}
Kintex 7	526/225	2	410 MHz
Kintex Ultra Scale	436	1	330 MHz
Zynq 7000	448	1	330 MHz
Zynq	509/255	2	270 MHz
Artix 7	480/212	2	289 MHz
Virtex Ultra Scale	438	1	330 MHz
Virtex 7	523/242	2	417 MHz
Virtex 6	475/201	2	281 MHz
Virtex 5	487/215	2	271 MHz
Virtex 4	623/469	2	221 MHz
Spartan 6	525/193	2	178 MHz
Spartan 3E	620/472	2	129 MHz
Spartan 3	607/462	2	123 MHz

Device	LUTs /FF	Memory Blocks	F _{max}
Spartan 7	1 135/755	0	300 MHz
Spartan 7	948/633	2	300 MHz

DELIVERABLES

- **Source code:**
 - VERILOG or VHDL Source Code
 - VERILOG or VHDL test bench environment
 - Active-HDL automatic simulation macros
 - ModelSim automatic simulation macros
 - Tests with reference responses
 - Technical documentation
 - Installation notes
 - HDL core specification
 - Datasheet
 - Synthesis scripts
 - Example application
- **Netlist**
 - Netlist for selected FPGA family
 - Sample FPGA project
 - Technical documentation
 - HDL core specification
 - Datasheet
- **Technical support**
 - IP Core implementation
 - 3 months maintenance
 - Delivery of the IP Core and documentation updates
 - Phone & email support
 - Design consulting

LICENSING

Comprehensible and clearly defined licensing methods without royalty-per-chip fees make use of our IP Cores easy and simple.

- **Single-Site license option** - dedicated to small and middle sized companies which run their business at one place.

- **Multi-Site license option** - dedicated to corporate customers which operate at several locations. The licensed product can be used at selected company branches.

In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. There are no restrictions regarding the time of use.

There are two formats of the delivered IP Core that you can choose from:

- VHDL or Verilog RTL synthesizable source code (called HDL Source code)

- FPGA EDIF/NGO/NGD/QXP/VQM (called Netlist)

HDL Source code is suitable for ASIC and FPGA projects. The Netlist license is intended for FPGA projects only.

CONTACT

Digital Core Design Headquarters:

Wroclawska 94, 41-902 Bytom, POLAND

E-mail: info@dcd.pl

tel.: 0048 32 282 82 66

fax: 0048 32 282 74 37

Distributors:

Please check: dcd.pl/contact-us/