


D6840



Programmable Timer Module

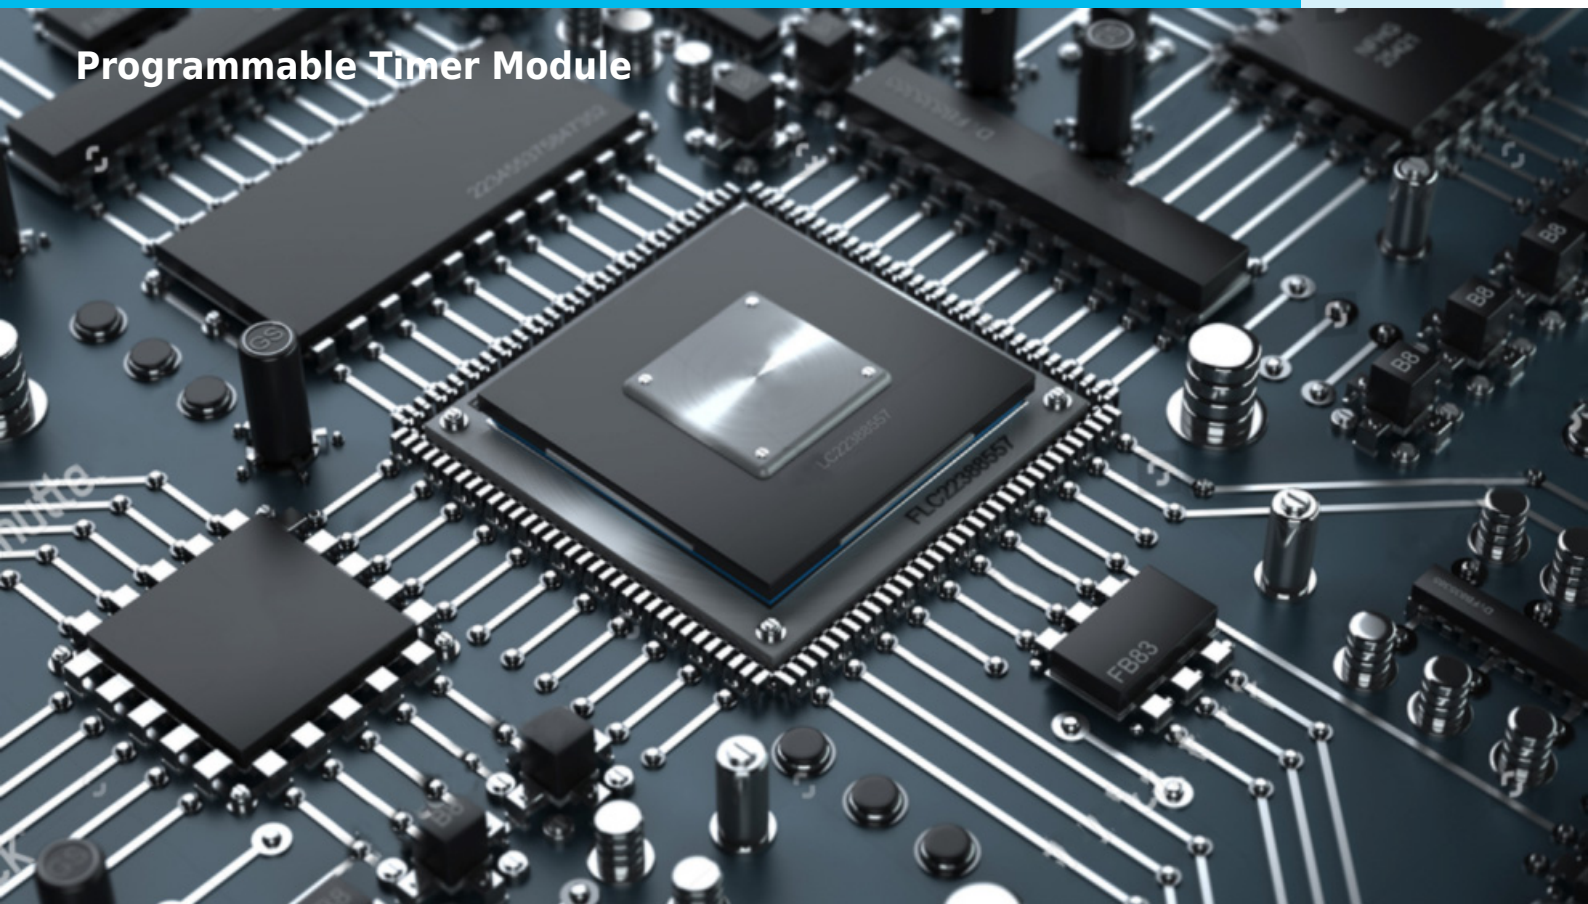

COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

IP CORE OVERVIEW

The D6840 is a programmable timer module **compatible with the 6840 industry standard**. It was designed to be used in **peripheral devices for D68xx processors**. Moreover, our proprietary IP Core works perfectly as a **separate module in applications** where the 6840 timer features are useful. The D6840 has **three separate 16-bit timers** with individual control and common status registers. The timers may be used for square wave generation with duty cycle regulation. The signal may then be generated as a **continuous wave** or **single-shot mode**. But this is not all - our unique module can be used **for frequency or pulse width measurement and comparison**. The D6840 has an interrupt which is used by the CPU in a controlling module. As all of our solutions, the D6840 is a technology independent design which can be implemented in a variety of process technologies.

KEY FEATURES

- Compatible with 6840 industry standard
- Three separate timers
- Two operation modes
 - Wave synthesis
 - Wave measurement
- Two generation modes
 - Continuous
 - Single shot
- Gating system for each clock input
- Separate timer outputs
- Prescaler mode for timer3 input clock
- External clock or E clock used for timer decrement
- Interrupt generation
- Split bus for input and output data
- Fully synthesizable
- Static synchronous design and no internal tri-states

DESIGN FEATURES

The functionality of the D6840 core was based on the MC6840. The following characteristics differentiate the D6840 from TI devices:

- The IP core has an additional clock input, which is a main clock domain. The main clock is at least four times faster

than the E clock. Typically, the main clock domain is the same as the clock for D68xx CPU which manages the D6840 module.

- Input E is treated as an input signal and synchronized to main clock domain. All counter events are related to the E signal, but are synchronized with the main clock domain. Typically, the E signal is connected from a D68xx CPU which manages the D6840 module.
- All latches implemented in original 6840 devices are replaced by equivalent flip-flop registers with the same functionality.

UNITS SUMMARY

CPU Interface - Performs access to internal registers from CPU. This module contains all control and status registers. There is also MSB and LSB buffer, used for access to 16-bit counter and Latch.

Timer1, 2, 3 - Main module, which contains 16-bit counter with all logic used for decrement, gating input clock and generating output signal and interrupt.

C3 Prescaler - clock divider for C3 input. Used for divide clock by 8 in pre-scaled mode of timer3.

APPLICATIONS

- External module for D68xx processors
- Gated wave generation
- Pulse width modulation
- Frequency measurement and comparison
- Pulse width measurement and comparison

PERFORMANCE

The following table gives a survey about the Core area and performance in **LATTICE®** devices after Place & Route (all key features included):

Device	Speed grade	LUTs/PFUs	F _{max}
SC	-7	459 / 193	262 MHz
ECP2	-7	448 / 192	214 MHz
XP2	-7	448 / 192	145 MHz
XP	-5	433 / 192	130 MHz
ECP	-5	433 / 192	161 MHz
EC	-5	433 / 192	161 MHz

DELIVERABLES

- **Source code:**
 - VERILOG or VHDL Source Code
 - VERILOG or VHDL test bench environment
 - Active-HDL automatic simulation macros
 - ModelSim automatic simulation macros
 - Tests with reference responses
- Technical documentation
 - Installation notes
 - HDL core specification
 - Datasheet
- Synthesis scripts

- Example application
- **Netlist**
 - Netlist for selected FPGA family
 - Sample FPGA project
 - Technical documentation
 - HDL core specification
 - Datasheet
- **Technical support**
 - IP Core implementation
 - 3 months maintenance
 - Delivery of the IP Core and documentation updates, minor and major versions changes
 - Phone & email support

LICENSING

Transparent and clearly defined licensing methods without royalty-per-chip fees, make use of our IP Cores easy & simple.

- **Single-Site license option** - dedicated to small and middle sized companies, which run their business in one

place.

- **Multi-Site license option** - dedicated to corporate customers who operate at several locations. The licensed product can be used in selected company branches.

In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. The license is royalty-per-chip free. There are no restrictions regarding the time of use.

There are two formats of the delivered IP Core:

- VHDL or Verilog RTL synthesizable HDL Source code
- FPGA EDIF/NGO/NGD/QXP/VQM Netlist

CONTACT

Digital Core Design Headquarters:

Wroclawska 94, 41-902 Bytom, POLAND

E-mail: info@dcd.pl

tel.: 0048 32 282 82 66

fax: 0048 32 282 74 37

Distributors:

Please check: dcd.pl/contact-us/