DIGITAL CORE DESIGN

D6803

8-bit Microcontroller

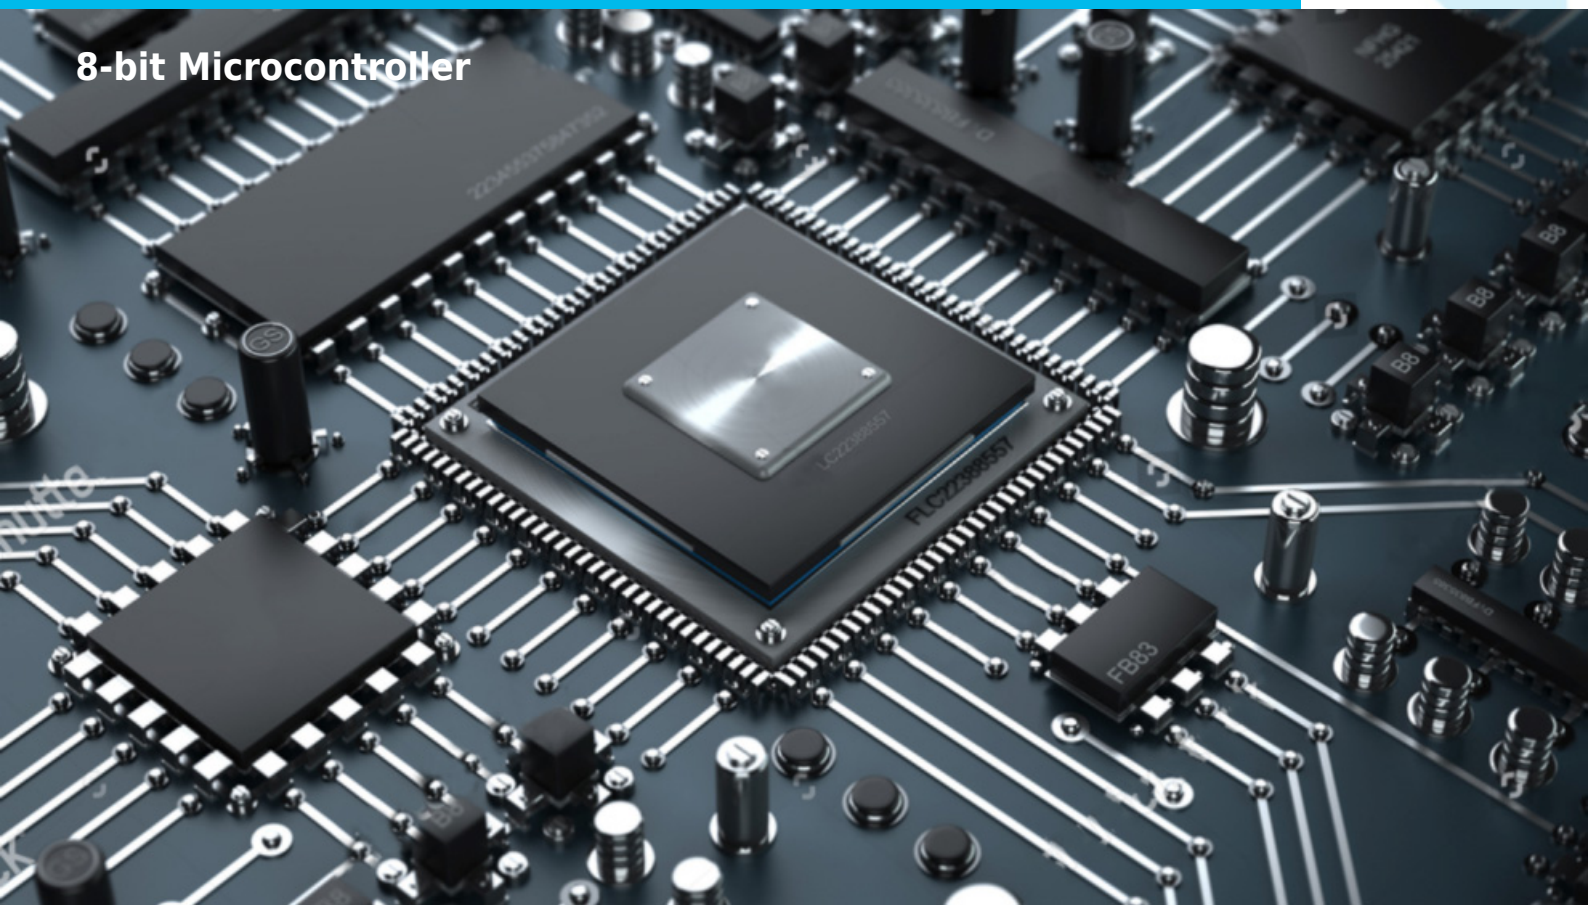

COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

IP CORE OVERVIEW

D6803 8-BIT MICROCONTROLLER IP CORE – MC6803 COMPATIBLE SOFT MCU FOR FPGA & ASIC

The **D6803** is a **synthesizable 8-bit microcontroller IP core**, fully **binary-compatible with the Motorola MC6803**. Designed as a **drop-in replacement** for legacy MC6803 microcontrollers, the D6803 enables reuse of existing software while delivering modern **SoC, FPGA, and ASIC integration** capabilities.

In its standard configuration, the D6803 integrates key peripheral functions directly on-chip, significantly reducing external component count and simplifying system design. The core includes an **asynchronous Serial Communications Interface (SCI)** and a **16-bit programmable timer with three operating modes**, supporting precise timing and control in embedded applications.

To support energy-sensitive designs, the D6803 features a **software-controlled WAIT power-saving mode**, making it particularly well suited for **automotive, industrial, and battery-powered systems** where low power consumption and deterministic behavior are critical.

Key Features & Benefits

- **100% MC6803 binary compatibility** – run existing firmware with no modifications
- **Synthesizable soft IP** – ideal for FPGA and ASIC implementations
- **Integrated SCI interface** – reliable serial communication
- **16-bit programmable timer** – supports three functional modes
- **Low-power WAIT mode** – optimized for energy-efficient designs
- **Fully customizable configuration** – include only what your design requires
- **No wasted silicon or licensing overhead**

Verification, Debug & Integration

The D6803 IP Core is delivered with a **fully automated test bench** and a **comprehensive regression test suite**, ensuring smooth validation throughout every stage of the SoC design and verification flow.

For development and system bring-up, the core includes built-in support for **DCD's DoCD™ Hardware Debug System**. DoCD™ is a **real-time, non-intrusive hardware debugger** that provides full visibility into the entire System-on-Chip, allowing engineers to:

- Halt, run, step, or skip instructions
- Read and write all CPU registers
- Access internal and external program and data memories
- Debug SFRs and user-defined peripherals without disturbing real-time execution

Ideal Applications

- Automotive electronics
- Battery-powered embedded systems
- Industrial controllers
- Legacy MC6803 system modernization
- Long-lifecycle SoC designs requiring software continuity

The D6803 IP Core combines proven MC6803 compatibility with modern customization, low power operation, and professional SoC-level debugging — making it the safest and most efficient upgrade path for legacy 6803-based designs.

D6803 VS MC6803 COMPARISON TABLE

Feature / Parameter	D6803 IP Core	Original MC6803

Copyright © 1999 - 2026 DCD - DCD-SEMI Sp. z o.o. All Rights Reserved.
All trademarks mentioned in this document are the property of their respective owners.

Feature / Parameter	D6803 IP Core	Original MC6803
Compatibility	100% MC6803 binary compatible	Original MC6803 hardware only
Implementation	Synthesizable Soft IP (FPGA/ASIC)	Fixed silicon microcontroller
Peripheral Integration	SCI interface, 16-bit programmable timer	Same, but limited to discrete implementation
Power Saving	Software-controlled WAIT mode	None or hardware-specific
Customization	Fully configurable – include only required features	Fixed feature set
Debug Support	DoCD™ real-time non-intrusive hardware debugger	None or external debugger required
Performance	Optimized pipeline for faster instruction execution	Standard MC6803 timing
Test & Validation	Automated testbench included	Not included
Ideal Use Cases	Automotive, battery-powered, industrial, SoC modernization	Legacy systems

WHY NOT ARM CORTEX-M?

While ARM Cortex-M microcontrollers dominate the embedded market, the **D6803 IP Core** provides unique advantages for **legacy MC6803 designs**:

- **Binary Compatibility:** Run existing MC6803 firmware without rewriting code.
- **Deterministic Operation:** Guaranteed instruction timing for critical automotive or industrial applications.
- **Customizable Features:** Only include the peripherals you need—no wasted silicon or licensing fees.
- **SoC & FPGA Ready:** Fully synthesizable for modern ASIC and FPGA designs.
- **Built-in Professional Debugging:** DoCD™ provides non-intrusive, real-time hardware debugging for faster system bring-up.

For projects requiring **migration from MC6803 with minimal software changes**, the D6803 is the most reliable and cost-effective solution compared to adopting a Cortex-M MCU.

ALL DCD'S IP CORES ARE TECHNOLOGY AGNOSTIC, ENSURING 100% COMPATIBILITY WITH ALL FPGA AND ASIC VENDORS.

For further details, email info@dcd-semi.com

CPU FEATURES

- Cycle compatible with original implementation
- Software compatible with 6803 industry standard
- I/O Wrapper making it pin compatiblecore
- Power saving mode: WAIT
- Fully synthesizable
- Static synchronous design
- No internal tri-states
- Scan test ready
- USB, Ethernet, I2C, SPI, UART, CAN, LIN, HDLC, Smart Card interfaces available

DESIGN FEATURES

- One global system clock
- Synchronous reset
- All asynchronous input signals are synchronized before internal use

PERIPHERALS

Peripherals implemented in a standard configuration of the D6803.

- **DoCD™ On-Chip Debugger**
  - Processor execution control
  - Read, write all processor contents
  - Hardware execution breakpoints
- **Three 8-bit and one 5-bit I/O Ports**
- **Extended Interrupt Controller**
- **Main16-bit timer/counter system**
  - 16 bit free running counter
  - Compare/Capture functions
  - Timer clocked by internal source
- **Full-duplex UART – SCI**
  - Standard Non-return to Zero format (NRZ)
  - Integrated baud rate generator
  - Enhanced receiver data sampling technique
  - Overrun and Framing error detection
  - Wake-up block to recognize UART wake-up from IDLE
  - Three SCI related interrupts

OPTIONAL PERIPHERALS

The following optional peripherals can be implemented upon customer's request.

- **ADC Support**
- **Ethernet MAC Controller**
- **CAN, LIN Controllers**
- **I2C bus controller – Master**
- **I2C bus controller – Slave**
- **PWM – Pulse Width Modulation Timer**
- **Fixed-Point arithmetic coprocessor**
- **Floating-Point arithmetic coprocessor IEEE-754**

Copyright © 1999 - 2026 DCD - DCD-SEMI Sp. z o.o. All Rights Reserved.
All trademarks mentioned in this document are the property of their respective owners.

standard single precision

UNITS SUMMARY

Control Unit – Performs the core synchronization and data flow control. This module manages execution of all instructions.
Opcode Decoder – Performs an instruction opcode decoding and the control functions for all other blocks**.**
ALU – Arithmetic Logic Unit performs the arithmetic and logic operations during execution of an instruction. It contains accumulator (A, B), Condition Code Register (CCREG), Index register X and related logic like arithmetic unit, logic unit, multiplier and divider.
Bus Controller – Program Memory, Data Memory interface controls access into the program and data memories. It contains Program Counter (PC), Stack Pointer (SP) register, and related logic.
Interrupt Controller – responsible for the interrupt manage system for the external & internal interrupts and exceptions processing. It manages auto-vectored interrupt cycles, priority resolving and correct vector number creation.
Timer with Compare Capture – The programmable timer is based on free-running 16-bit counter, plus input capture/output compare circuitry. The timer can be used for many purposes, including measuring pulse length of two input signals and generating two output signals. The timer has 16-bit architecture hence each specific functional segment is represented by two 8-bit registers. These registers contain the high and low byte of that functional block. Accessing the low byte of a specific timer function, allows full control of that function, however, an access of the high byte, inhibits that specific timer function until the byte is also accessed. The input-capture channel has its own 16-bit time capture latch (input-capture register) and the output-compare channel has its own 16-bit compare register. Additional control bits permit software to control the edge(s), that trigger each input-capture function and the automatic actions that result from output-compare functions. Although hardwired logic is included to automate many timer activities, this timer architecture is mainly a software-oriented system. This structure is easily adaptable to a very wide range of applications, although it is not as efficient, as a dedicated hardware for some specific timing applications.
SCI – a full-duplex UART type asynchronous system, using standard non-return to zero (NRZ) format: 1 start bit and a 1 stop bit. The Core resynchronizes the receiver bit clock on all one to zero transitions in the bit stream. Therefore, differences in baud rate between the sending device and the SCI are not as likely to cause reception errors. Three logic samples are taken near the middle of data bit time and majority logic decides the sense for the bit. The receiver also has the ability to enter a temporary standby mode (called receiver wakeup), to ignore messages intended for a different receiver. Logic automatically wakes the receiver up, in time to see the first character of the next message. This wakeup feature greatly reduces CPU overhead in multi-drop SCI networks. The SCI transmitter can produce queued characters of idle (whole characters of all logic 1) and break (whole characters of all logic 0). In addition to the usual transmit data register empty (TDRE) status flag.
I/O Ports – Three ports are 8-bit general-purpose bidirectional I/O system and one (PORTB) is 5-bit. The PORTA, PORTB, PORTC, PORTD data registers, have their corresponding data direction registers DDRA, DDRB, DDRC, DDRD to control ports data flow. It assures that all D6803's ports have full I/O selectable registers. Writes to any ports pins cause data to be stored in the data registers. If any port pins are configured as output, then data registers are driven out of those pins. Reads from port pins configured as input, causes that input pin is read. If port pins is configured as output, during read data register is read. Writes to any ports pins not configured as outputs, do not cause data to be driven out of those pins, but the data is stored in the output registers. Thus, if the pins later become outputs, the last data written to port, will be driven out the port pins.
DoCD™ Debug Unit – a real-time hardware debugger which provides debugging capability of a whole SoC system. The, **DoCD™** provides non-intrusive debugging of running application. It can halt, run, step into or skip an instruction, read/write any contents of microcontroller, including all registers, internal, external, program memories, all SFRs, including user defined peripherals. Hardware breakpoints can be set and controlled on program memory, internal and external data memories, as well as on SFRs. Hardware breakpoint is executed, if any write/read occurs at particular address, with certain data pattern or without pattern. The **DoCD™** system includes three-wire interface and complete set of tools, to communicate and work with core in real time debugging. It is built as scalable unit and some features can be turned off by the user, to save silicon and reduce power consumption. When debugger is not used, it is automatically switched to power save mode. Finally, when debug option is no longer used, whole debugger is turned off. The separate CLKDOCD clock line allows the debugger to operate while the CPU is in STOP mode and the major clock line CLK is stopped.

PERFORMANCE

For precise **MICROSEMI FPGA** performance insights, reach out to us at info@dcd.pl. Our dedicated team is ready to assist you with any inquiries.

DELIVERABLES

- HDL Source Code
- Testbench environment
  - Automatic Simulation macros
  - Tests with reference responses
- Synthesis scripts
- Technical documentation
- 12 months of technical support

LICENSING

Comprehensible and clearly defined licensing methods without royalty-per-chip fees make use of our IP Cores easy and simple.
– Single-Site license option – dedicated to small and middle sized companies which run their business at one place.

Copyright © 1999 - 2026 DCD - DCD-SEMI Sp. z o.o. All Rights Reserved.
All trademarks mentioned in this document are the property of their respective owners.

– *Remote Access license option* – allows authorized users to access and use the licensed product from a remote location.
In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. There are no restrictions regarding the time of use.

The IP is delivered in HDL Source code suitable for ASIC and FPGA projects.

CONTACT

DCD-SEMI Sp. z o.o. Headquarters:
Wroclawska 94, 41-902 Bytom, POLAND
E-mail: info@dcd.pl
tel.: +48 32 282 82 66
fax: +48 32 282 74 37
Distributors:
Please check: dcd.pl/contact-us/

Copyright © 1999 - 2026 DCD - DCD-SEMI Sp. z o.o. All Rights Reserved.
All trademarks mentioned in this document are the property of their respective owners.