


# HID PLATFORM

USB 2.0 Human Interface Devices Design Platform

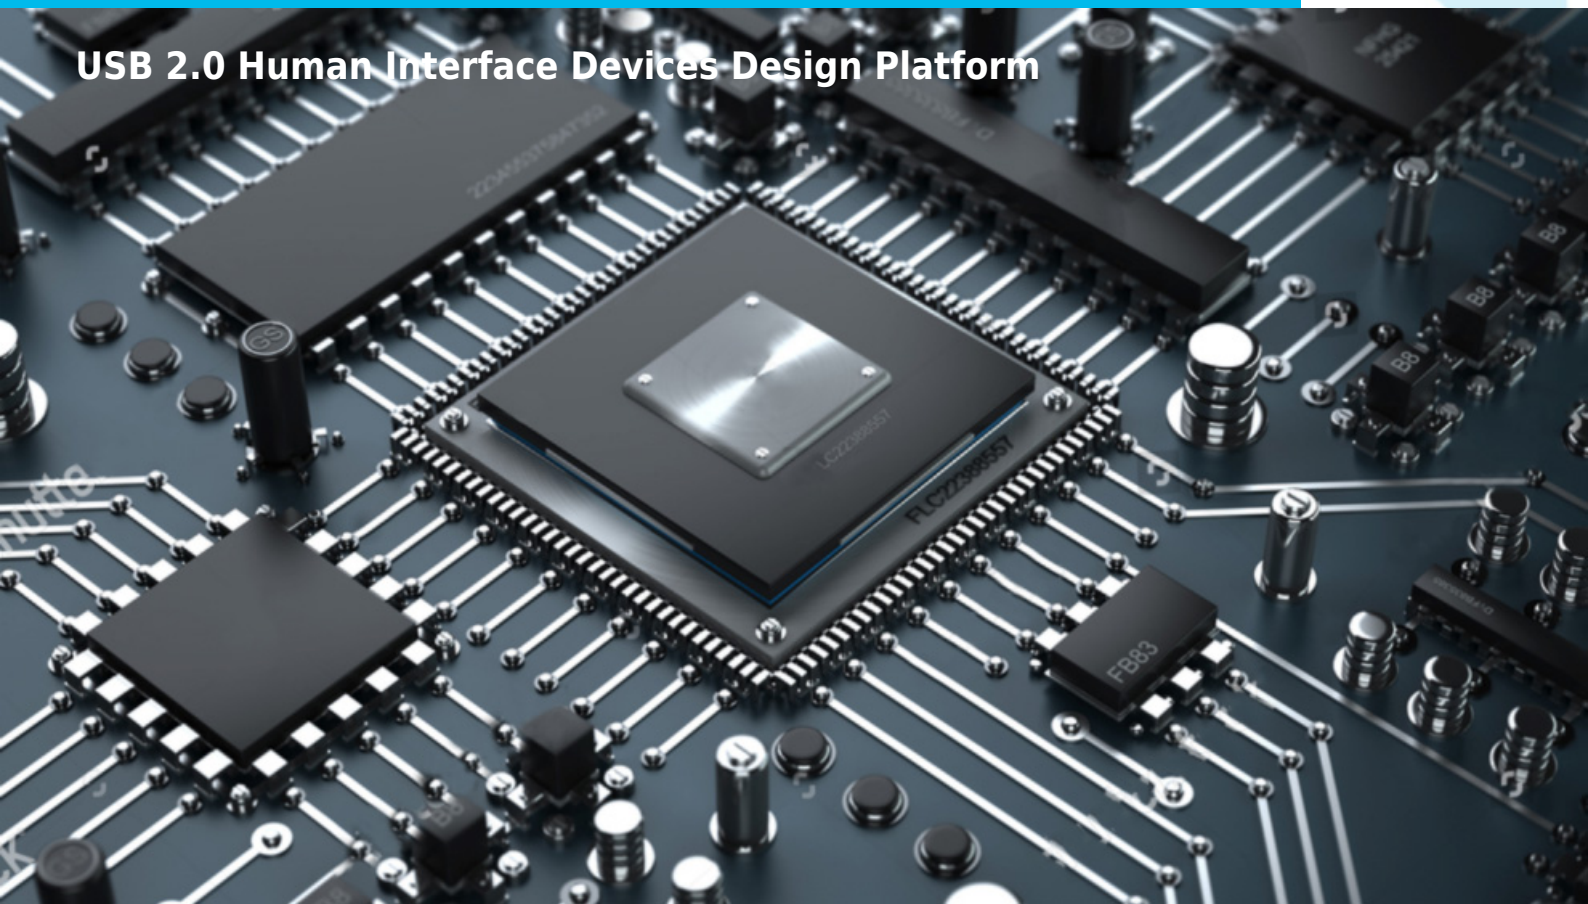

## COMPANY OVERVIEW

Digital Core Design is a leading IP Core provider and a System-on-Chip design house. The company was founded in 1999 and since the very beginning has been focused on IP Core architecture improvements. Our innovative, silicon proven solutions have been employed by over 300 customers and with more than 500 hundred licenses sold to companies like Intel, Siemens, Philips, General Electric, Sony and Toyota. Based on more than 70 different architectures, starting from serial interfaces to advanced microcontrollers and SoCs, we are designing solutions tailored to your needs.

## IP CORE OVERVIEW

The USB 2.0 **HID Design Platform** is a complete, integrated solution, dedicated to a wide range of USB-based Human Interface Devices, like mouse, keyboard, and tablet. The complete HID Design Platform includes:

- DUSB2 peripheral controller, designed to support 12 Mb/s “Full Speed” (FS) and 480 Mb/s “High Speed” (HS) serial data transmission rates
- DP8051XP ultra high performance, speed optimized, fully customizable 8051 8-bit microcontrollers with built-in DoCD™ debug IP core
- Human Interface Devices software stack optimized for DP8051XP 8-bit CPU
- FPGA board with ready-to-use, preprogrammed example HID application
- HAD2 – DoCD™ Hardware Assisted Debugger board
- DoCD™ Debug Software
- DoCD™ driver for Keil development software
- DoCD™ driver for IAR development software

### DESIGN FEATURES:

**ALL DCD'S IP CORES ARE TECHNOLOGY INDEPENDENT WHICH MEANS THAT THEY ARE 100% COMPATIBLE WITH ALL FPGA & ASIC VENDORS E.G.**

- **Altera / Intel,**
- **Xilinx / AMD,**
- **Lattice,**
- **Microsemi / Microchip,**  
**and others.**
- **TSMC**
- **UMC**
- **SK Hynix**  
**and others.**

## KEY FEATURES

- Full compliance with the USB 2.0 specification
- Full-speed 12 Mbps operation
- High-speed 480 Mbps operation
- Supports UTMI Transceiver Macrocell Interface
- Synchronous RAM interface for FIFOs
- Suspend and resume power management functions

- 100% software compatible with industry standard 8051
- Up to 256 bytes of internal (on-chip) Data Memory
- Up to 64K bytes of internal (on-chip) or external (off-chip) Program Memory
- Up to 16M bytes of external (off-chip) Data Memory
- User programmable Program Memory Wait States solution for wide range of memories speed
- User programmable External Data Memory Wait States solution for wide range of memories speed
- Allows operation from a wide range of CPU clock frequencies
- Fully synthesizable
- Static synchronous design
- Positive edge clocking
- No internal tri-states
- Lite design, small gate count and fast operation
- Scan test ready

## APPLICATIONS

- Keyboard
- Mouse
- Pen tablet
- Trackball
- Touchpad
- Joystick
- Gamepad
- Steering Wheel
- Barcode scanner

## UNITS SUMMARY

**UTMI Interface** - The UTMI interface is clocked by utmiclk clock and manages communication with USB 2.0 Transceiver Macrocell. It is responsible for reset detection, speed handshake, token, data and handshake packet reception and transmission.

**CPU Interface** - The CPU interface module is clocked by cpuclock and manages communication with DP8051XP CPU. In this module DUSB2 core configuration and status registers are being located.

**SRAM Interface** - The SRAM interface module manages communication with Synchronous Random Access Memory. It generates address, read and write signals for the SRAM memory and buffers data bytes during the FIFO read and write operations.

**EP0 endpoint** -The EP0 control endpoint is Special bidirectional endpoint used for device configuration. Allows generic USB control and status access.

**EP1 & EP2 endpoints** - The EP1 and EP2 data endpoints are unidirectional, configurable endpoints, used for application specific data transmission.

**DP8051XP CPU** - Ultra high performance, speed optimized 8-bit embedded controller, 100% software compatible with industry standard 8051

## PERFORMANCE

The following tables give a survey about the Core area and performance in Programmable Logic Devices after Place &

Route.

Device	Speed grade	cpuclk F <sub>max</sub>	utmiclk F <sub>max</sub>
SC	-7	100 MHz	>100 MHz
ECP2	-7	80 MHz	>100 MHz
ECP2M	-7	70 MHz	>100 MHz
XP2	-7	60 MHz	>100 MHz

Core performance in LATTICE® devices

An area utilized by a complete, integrated USB 2.0 HID Design Platform in vendor specific technologies, is summarized in the following table.

Component	Area	
	[LUT4s]	[FFs]
CPU interface	215	170
UTMI interface	250	230
SRAM interface	110	95
EPO endpoint	145	140
EP1 endpoint	155	155
EP2 endpoint	155	155
DP8051XP CPU	1 180	395
DoCD™ debug IP core	360	270
<b>Total area</b>	<b>2 570</b>	<b>1 610</b>

Core components area utilization in ECP2 and ECP2M families

Component	Area	
	[LUT4s]	[FFs]
CPU interface	240	170
UTMI interface	290	230
SRAM interface	120	95
EPO endpoint	160	140
EP1 endpoint	175	155
EP2 endpoint	175	155
DP8051XP CPU	1 315	395
DoCD™ debug IP core	400	270
<b>Total area</b>	<b>2 875</b>	<b>1 610</b>

Core components area utilization in XP2 family

Component	Area	
	[LUT4s]	[FFs]
CPU interface	200	170
UTMI interface	230	230
SRAM interface	100	95
EPO endpoint	130	140
EP1 endpoint	140	155
EP2 endpoint	140	155
DP8051XP CPU	1 100	395
DoCD™ debug IP core	330	270
<b>Total area</b>	<b>2 370</b>	<b>1 610</b>

Core components area utilization in SC family

## DELIVERABLES

- **Source code:**
  - VERILOG or VHDL Source Code
  - VERILOG or VHDL test bench environment
    - Active-HDL automatic simulation macros
    - ModelSim automatic simulation macros
    - Tests with reference responses
  - Technical documentation
    - Installation notes
    - HDL core specification
    - Datasheet
  - Synthesis scripts
  - Example application
- **Netlist**
  - Netlist for selected FPGA family
  - Sample FPGA project
  - Technical documentation
    - HDL core specification
    - Datasheet
- **Technical support**
  - IP Core implementation
  - 12 months maintenance
    - Delivery of the IP Core and documentation updates
    - Phone & email support
    - Design consulting

## LICENSING

Comprehensible and clearly defined licensing methods without royalty-per-chip fees make use of our IP Cores easy and simple.

- **Single-Site license option** - dedicated to small and middle sized companies which run their business at one place.

- **Multi-Site license option** - dedicated to corporate customers which operate at several locations. The licensed product can be used at selected company branches.

In all cases the number of IP Core instantiations within a project and the number of manufactured chips are unlimited. There are no restrictions regarding the time of use.

There are two formats of the delivered IP Core that you can choose from:

- VHDL or Verilog RTL synthesizable source code (called HDL Source code)

- FPGA EDIF/NGO/NGD/QXP/VQM (called Netlist)

HDL Source code is suitable for ASIC and FPGA projects. The Netlist license is intended for FPGA projects only.

## CONTACT

### Digital Core Design Headquarters:

Wroclawska 94, 41-902 Bytom, POLAND

E-mail: info@dcd.pl

tel.: +48 32 282 82 66

fax: +48 32 282 74 37

### Distributors:

Please check: dcd.pl/contact-us/